

UNIFOLD

WATCH
THE WORLD
UNFOLD

FENSA
Registered Company



Glass & Glazing Federation Member



Official Police Security Initiative





UNI FOLD

THE EFFORTLESSLY SLIM NEW FOLDING SLIDING DOOR

With **just a 120mm, glass-to-glass sightline**, UniFold will open up your room to the light and bring the outside in, creating a functional, open space for living, working and entertaining.


Slim 120mm glass-to-glass sightline

Fully Adjustable for ease of installation

Can achieve PAS 24 / Secured by design

Fully openable corners

Market beating prices

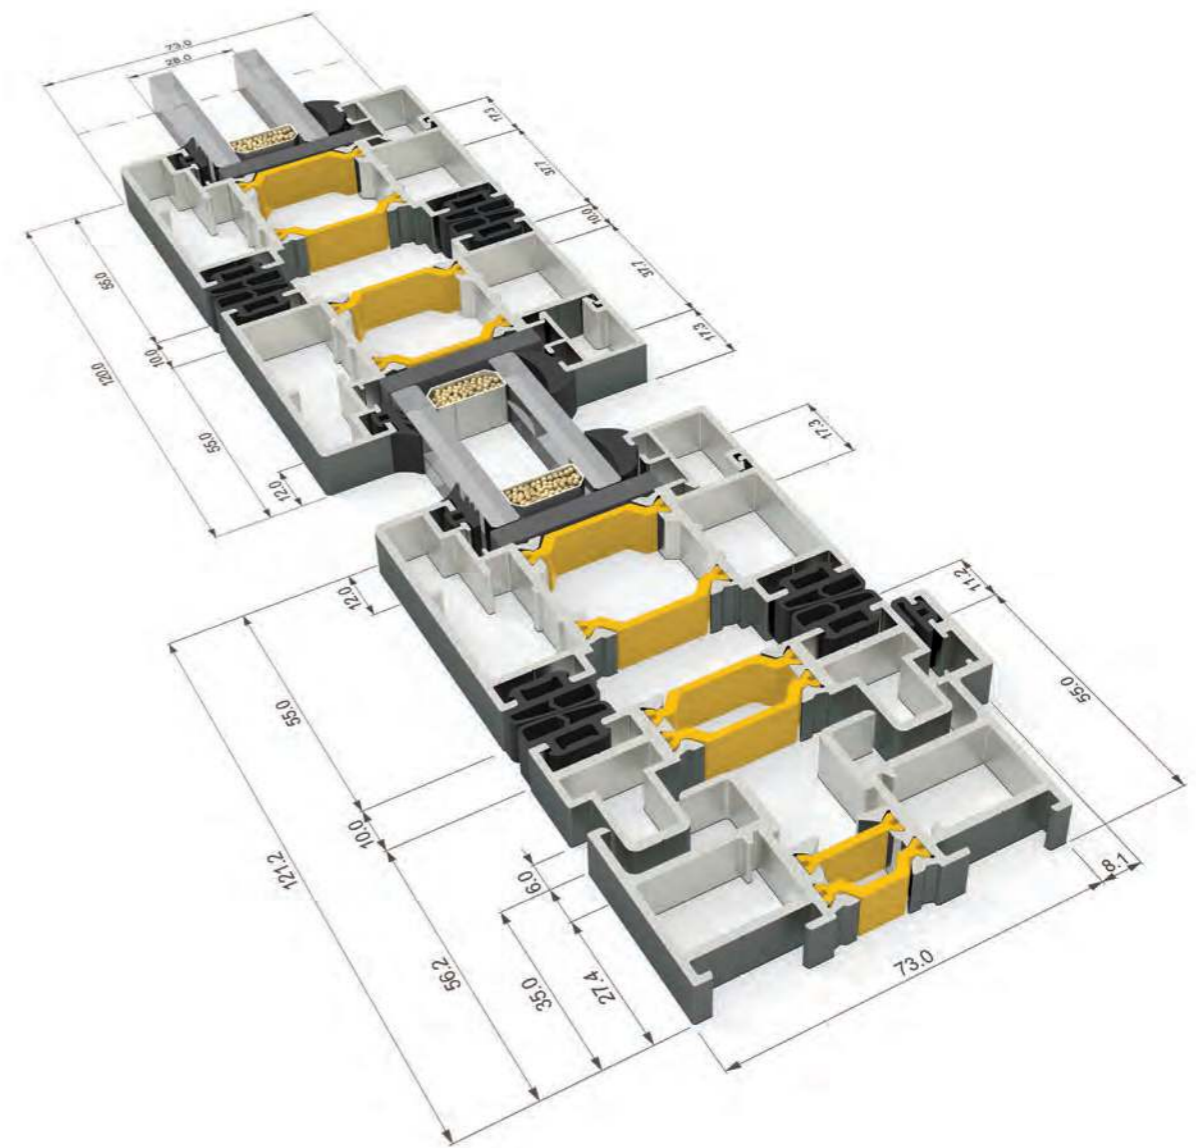

Size Limits

Maximum panel width	1200 mm
Maximum panel height	3000 mm
Maximum panel weight	120 kg

FRAME DEPTH	73 mm
GLAZING THICKNESS	24-44 mm
GLAZING METHOD	Internally beaded
MINIMUM SIGHTLINE	120 mm
ENHANCED SECURITY	PAS24

PERFORMANCE	
U-VALUE	From 1.4 W/m ² K
AIR PERMEABILITY	Class 4
WATER TIGHTNESS	Class 9A
WIND RESISTANCE	Class A3

THRESHOLD HEIGHT	
STANDARD	55 mm
DEEP	67.5 mm
LOW	40 mm
ULTRA LOW	20 mm